NPIC REport	5 70503094/58 CIA 105 No. 3094-58	
No. Pages: 256_	TOP SECRET WORKING PAPER	
COPY NO.: 1 of 1		
Answers to Req	06-05-58 uirements submitted 06-05-58	
in Travel Fo	lder Brief of	

KOMSOMOLSK, USSR

JOB NO. 78TO4759A BOX NO. 1 FOLDER NO. 29	DOC REV BATE BY OBIG COMP OP) TYPE ORIG CLASS PAGES 57 REV CLASS JUST NEXT REV AUTH: HR 10-2
TOTAL DOCS HEREIN	
RA RA	THIELLIGENCE

6 May 1958

WARNING: HANDLE VIA TALENT CONTROL CHANNELS ONLY

CENTRAL INTELLIGENCE AGENCY

This document contains information usable only within the TALENT CONTROL SYSTEM. It is to be seen on a MUST-KNOW BASIS ONLY BY PERSONNEL ESPECIALLY INDOC-TRINATED AND AUTHORIZED. Reproduction is prohibited unless approved by the originator.

Declass Review by
rgyed For Release 2001/11/07: CIA-RDP78T0475**FのP**01**8E0で展**

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

WARNING

This material contains information affecting the National Defense of the United States within the meaning of the espionage laws, Title 18, USC, Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law. Approved For Release 200W11/0Z : CIA-RDPZ8704759A000100010036-7

Answers to Requirements submitted in Travel Folder Brief of

KOMSOMOLSK, USSR

Approved For Release 1701 Time CIA 1805 ST04759A000100010036-7

Foreword

This pilot study was prepared to show that many of the requirements submitted in the Travel Folder Brief Program can be quickly and accurately answered by a study of aerial photography. Less than 100 man-hours were spent in preparing this report.

Approved For Release 201/14/07/C/A ROP 201/59A000100010036-7

General Requirement No. 1.

- a. Describe street pattern.
- Average widths of main through routes and other streets.
- c. Type of street surfacing and condition.

Answer:

- a. The street pattern as shown on the referenced Air Force Target Chart gives a rough, approximate layout of the city streets. A detailed, accurate city plan could be prepared from available photography showing the many new streets, new housing developments, new industries, etc. Street names, government offices and buildings, commercial and cultural buildings and much other data can be obtained readily by comparing available photography with collateral material.
- feet. Most streets are feet wide.
- c. The through routes and major industrial roads are surfaced with bituminous material, but most of the streets are snow-covered and are probably un-improved.

25X1D

Approved For Release 101/1677 TA 61-55 04759A000100010036-7

- General Requirement No. 2. a. Describe average height (stories) and construction of residential buildings.
 - b. Describe average height (stories) and construction of public and governmental buildings.
 - c. Tallest building in city.

Answer:

- a. Residential buildings. There are several groups of 3-4 story apartment houses in the central part of the city along the principal avenues. Most of the residential housing, however, is single story, detached housing.
- b&c. Public and Governmental buildings. A group of 5-6 story high public buildings are located at the center of the city. These are the tallest buildings in city.

Approved For Release 1010 1010 E CI4 102 T04759A000100010036-7

- General Requirement No. 3. a. Ascertain source of drinking and industrial water.
 - Describe any water pumping and purifying installations.

Answer:

- There is no apparent central water system. Industrial water is obtained from the Amur River and its tributaries.
- The only apparent water pumping and purifying installations are associated with the large steel plant and shipyard and will be described in detail in forth-coming PI reports.

Approved For Release 11/5/17/12 A 21/25/04759A000100010036-7

General Requirement No. 4. a. Describe extent and adequacy of sewerage system and present means of sewage disposal.

Answer:

There is no evidence of a central sewerage system or sewage disposal plant.

Approved For Release 100 SETRETC 1112 8T04759A000100010036-7

General Requirement No. 5.

Estimate bed capacity of any hospitals in city. Describe general health and sanitation conditions.

Answer:

We could confirm the location of any hospitals reported in collateral, PW reports, etc. We could determine the size of the hospital and estimate the bed capacity. However, this time-consuming analysis is beyond the scope of this report.

Approved For Release 2001 1007 150 REP 155 9A000100010036-7

General Requirement No. 6. Indicate whether gas is available at present time.

Answer:

There are no gasometers in the city or vicinity. The steel plant has no coking facilities that might produce gas as a by-product.

Approved For Release 2000 1/0 C(1) A-RD 759A000100010036-7

General Requirement No. 7. Streetcars in the city began operating in 1950. Describe any extensions to the street car system and report other transit media.

Answer:

There is a three-mile long, double track street car system in the city, as shown on the accompanying annotated enlargement. The major railroad system is also shown.

Approved For Release 107/1305 RelA-RUP 3 04759A000100010036-7

1. Ref. 1-5. Probable Petroleum Products Storage Area.

Requirement: 1. Confirm location and existence.


2. Give number and size of tanks.

Answer:

1. There is no petroleum products storage area at this location nor within a mile radius of this reported position.

2. None.

Sketch of Komsomolsk Armament and Equipment Plant, Selskonab 313

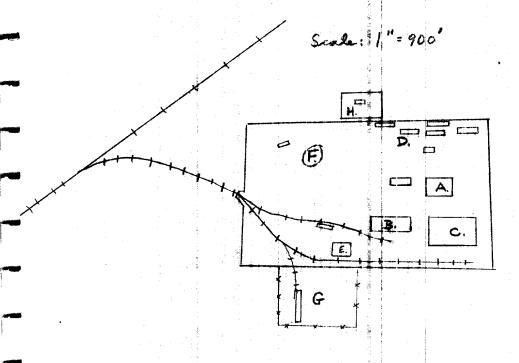

KĘY

- Shop building. 300'x 200', 30' high. Monitor roof. Α.
- Shop building. 450'x 150', 40' high. Monitor roof. В.
- Shop building. 480'x 290', 30' high. Monitor roof. C.
- Six Storage Warehouses, wooden, each approx. 200'x 60'. D.
- Boilerhouse, 85' x 65', with adjoining coal storage pile. E.
- In this area are approx. 35 small wooden storage bldgs, 60'x 20 acis. F.
- Pessible storage or testing area. Served by rail. Enclosed G. by a double wire fence.
- Separate compound surrounded by high wooden fence. Possible Η. storage or laboratory testing area.

Entire plant area surrounded by foot high wooden fence and several guard towers.

25X1D

TOP SECRET CHESS



2. Ref. 1-6. Armament and Equipment Plant, Selskosnab 313

Requirements:

- 1. Location.
- 2. Confirm name and products.
- 3. Number, size and construction of buildings.
- 4. Layout sketch.

Answer

- : 1. This plant incorrectly located on USAF Target Complex Chart. Actual location is one-half mile west of location shown on the chart.
 - 2. Cannot answer. Snow cover precludes identification of some products stored in the open in vicinity of plant.
 - 3. Three large shop buildings, structural steel constructions, each having monitor roof.
 (1) 300' x 200', 30' high. (2) 450' x 150', 40' high. (3) 480' x 290', 30' high.

Six large storage warehouses, wooden construction, each approximately 200' x 60'.

Thirty-five small wooden storage buildings, each 60' x 20'.

Boilerhouse, $85' \times 65'$, with adjoining coal storage pile.

4. See attached sketch.

Approved For Release 2001/11/07: CIA-RDF76104759A000100010036-7

3. Ref. 2-1. Petroleum Storage Area.

Requirement: Number and size of tanks.

: Four peaked-roof cylindrical P.O.L. storage tanks. Each tank, 115' diameter, 25' high. Answer

Approved For Release 101/136 REA-01155 04759A000100010036-7

4. Ref. 2-4. Petroleum Refinery, 409.

Requirement:

- 1. Sketch and description of refining equipment.
- 2. Any possible new construction?
- Evidence of the reported pipeline connecting the refinery to Sakhalin Island?
- 4. Photography.
- Number and size of storage tanks.

Answer:

- Refinery equipment appears to consist of two pipe still distillation units and one 60' high fractionating column.
- 2. No evidence of new construction.
- 3. As shown on the chart, the only pipeline leading from this refinery goes to an oil pier on the river approximately three miles east of the refinery.
- No answer.
- 5. 44 cylindrical P.O.L. storage tanks, as follows:
 - 2 115' diameter, 30' high
 - 12 55' diameter, 30' high

 - 1 80' diameter, 30' high 4 35' diameter, 20' high 25 20' diameter, 15' high

Approved For Release 2001/11/07: CIA-RD-78 104759A000100010036-7

5. Ref. 2-7. Airfield, AF Repair Shop/Depot

- Requirements: 1. Evidence of Air Force usage.
 - 2. New construction or repair activity.
 3. Estimate of repair capacity.
 4. Airborne or paratroops training?
 5. Barracks?

Answer: A detailed PI report on this installation is currently in progress. This report, requested I/AR, will answer these requirements.

Approved For Release 200 1/0/2: CIA-RDF76704759A000100010036-7

6. Ref. 2-8. Petroleum Storage, Southeast

Requirements: 1. Number and size of tanks.

Answer : 1. Twelve peaked-roof, cylindrical P.O.L. tanks, each 110' diameter and 40' high.

Approved For Release 20001100114-R0115004759A000100010036-7

7. Ref. 2-9. Airframe Plant 130

Requirements: 1. Number, size and construction of buildings.

2. Layout sketch.

3. Any information on number and type of aircraft in area.

Answer: A detailed PI report on this installation was requested by I/AR. This report is in progress and will answer these requirements.

25X1A

8. Ref. 2-11. Airframe Plant, Ordzhonikidze 126

Requirements:

- 1. Current products.
- 2. Number, size and construction of buildings.
- 3. Layout sketch.
- 4. Any information on number and type of aircraft in area.

Answer: A detailed PI report of this installation was requested by in progress. This report will answer these requirements.

25X1A

Approved For Release 2001/11/67 CARDP78104759A000100010036-7

9. Ref. 2-12. Possible Petroleum Storage Area.

Requirements: 1. Confirm.

2. Number and size of storage tank.

Answer : 1. Location correctly shown on referenced chart.

2. Two vertical cylindrical tanks. Each 75' diameter, 40' high.

Six vertical cylindrical tanks. Each 45' diameter, 30' high.

Ten vertical cylindrical tanks. Each 30' diameter, 25' high.

Nineteen vertical cylindrical tanks. Each 25' diameter, 20' high.

Six horizontal tanks. Each 35' long, 10' diameter.

Approved For Release 2001/11/07 : CIA-RDP78T04759A000100010036-7

10. Ref. 2-14. Locomotive Repair Plant.

Requirements: 1. Number, size and construction of buildings.

Layout sketch.
 Capacity.

: 1. No locomotive repair plant exists in this locality. This is an area of light industry and housing. Nearest railroad is over $\frac{1}{2}$ mile distant. Answer

We have the little to the

Approved For Release 200107/05 CRATORYS 59A000100010036-7


11. Ref. 2-15. Locomotive Repair Plant.

- Requirements: 1. Number, size and construction of buildings.
 - 2. Layout sketch.
 - 3. Capacity.

Answer

: The "plant" consists of one 100' x 85' monitor-roofed building that is used to service and repair the rolling stock of a narrow-gauge railroad that carries coal from a large coal storage area to a large thermal power plant 300 yards distant.

CR 2-15 LOCOMOTIVE REPAIR PLANT



TOP SECRET CHESS

- A. AIRFRAME PLANT, ORDZHONIKIDZE
- B. THERMAL POWER PLANT
- C. TRANSFORMER YARD
- D. LOCOMOTIVE REPAIR PLANT (CR 2-15)
- E COAL PILE
- RESERVE COAL PILES

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

Approved For Release 20 1 / 0 5 5 FRD 8 759A000100010036-7

12. Ref. 3-6. East Airfield Repair Shop.

- Requirements: 1. Evidence of Air Force usage.
 - 2. New construction or repair capacity.
 - 3. Estimate of repair capacity.4. Barracks?

 - 5. Type of Troops.

Answer

- : 1. East Airfield has a sod runway 2300' x 250', oriented NE/SW. Only aircraft on field are two small utility transports.
 - 2. No new construction. Housing and terrain conditions seriously limit expansion capabilities of this
 - 3. Repair facilities are very minor or non-existent.
 - 4. No barracks.
 - 5. Probably none.

Approved For Release 200 Mil/05 C A-RDF 3704759A000100010036-7

- 14. Ref. 3-8. Railroad Train Ferry Terminal, East
- Requirement: 1. Size and construction of pier.
 - 2. Number of sidings.
- Answer :1&2. This eastern terminal and its counterpart on the western side of the river consists of three piers, each at a different level above the river.

 Apparently only one pier at a time is used depending upon the seasonal level of the river.

 Each pier is 800' 900' long, h-5 tracks wide, and of earth-fill construction.

The railroad ferries are 310' long and transport four lines of cars, two of which can be loaded and unloaded at the same time.

The four railroad ferries ice-bound at the Komsomolsk Amur Shipyard are the only ferries evident in the area.

A detailed PI report on this facility, requested by S/TR, is in progress.

25X1A

Approved For Release 709/1007 A-RH-3304759A000100010036-7

15. Ref. 3-9. Pivan Petroleum Storage

Requirements: Number and size of tanks.

Answer: None. No petroleum storage in this area. At this

location is a small rail siding with four small wooden

buildings.

Approved For Release 1001 100 F CIA RIDES 8T04759A000100010036-7

16. Ref. 3-14. Railroad station, Yards and Shops

Requirements: 1. Number and length of tracks.
2. Locomotive and railroad car repair facilities.

25X1A

Answer: A detailed PI report on this installation was requested S/TR. This report is in progress and will answer this requirement.

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

17. Ref. 4-3. Motor Vehicle Assembly Plant

25X1A

- Requirements: 1. Is Construction complete?
 - 2. Confirm name and number of plant.
 - 3. Describe layout and any products seen.
 - 4. Evidence that trucks are only assembled or that parts are also being manufactured.

Answer: A detailed PI report of this installation was requested I/WA. This report, when completed, will answer most of these requirements.

Approved For Release 2001/11/07 : CIA-RDP78T04759A000100010036-7

Approved For Release 100 1104 CIRMER 8T04759A000100010036-7

18. Ref. 4-4. Storage Battery Plant 265

Requirements: 1. Exact location.

2. Number, size and construction of buildings.


3. Layout sketch. 4. New construction.

Answer : 1. There is a plant located at this site, but unable to confirm manufacture of storage batteries.

2 & 3. See annotated layout sketch.

4. One new building, 75' x 45' is under construction.

CR 4-4 STORAGE BATTERY PLANT 265

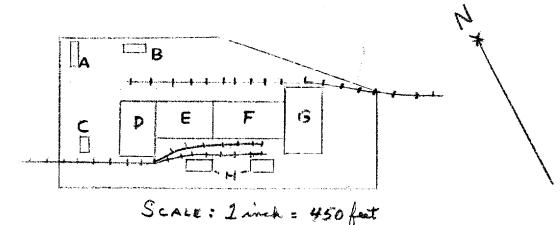

- A SHOP BUILDING 120' x 35'
- B SHOP BUILDING 110' x 451
- C BUILDING UNDER CONSTRUCTION, 75 / x45
- D SHOP BUILDING, 280' x 175', PITCHED ROOF,
- E SHOP BUILDING, 260' X 175', GABLE ROOF WITH
- F SHOP BUILDING, 340' X175', MONITOR ROCF
- G TWO SHOP BUILDINGS MONITOR ROOF,

Approved For Release 20001 370 147-RDH \$\$\$4759A000100010036-7

19. Ref. 4-5. Supply Depot, Central No. 1

Requirements: 1. Number, size and construction of warehouses. 2. Army or civilian?

Answer 1. 48 single-story, gable-roofed warehouses, each 165' x 70'. Rail-served.

2. Cannot be determined.

Approved For Release 2017/1907 CTA-R07295704759A000100010036-7

20. Ref. 4-6. Military Barracks.

Requirement: 1. Type of troops, airborne or paratroops?

2. Capacity.

Answer: 1. Cannot determine.

2. This small military barracks area consists of seven gable-roofed, two-story wooden barracks buildings with the following dimensions: three are 85' x 45' and one each measures 100' x 45', 125' x 25', 160' x 70' and 140' x 50'.

Approved For Release 2001/11/07 : CIA-RDP78T04759A000100010036-7

21. Ref. 4-8. Komsomolsk Steel Plant "Amurstad".

- Requirements: a. Confirm existence of two coke batteries.
 - b. Confirm existence of two open hearth furnaces.c. Any evidence of expansion?

 - d. Number, size and construction of buildings.
 - e. Layout sketch.

Answers:


- a. There are no coke batteries.
- b. There are two open hearth furnaces.
- c. Four shop buildings and an administration building are under construction. For details see accompanying annotated sketch.
- d & e. See accompanying annotated sketch.

Remarks:

There is no evidence of reported blast furnaces. No coke ovens, gasometers, nor any evidence of iron manufacture at this plant.

BOOK OF THE STREET

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

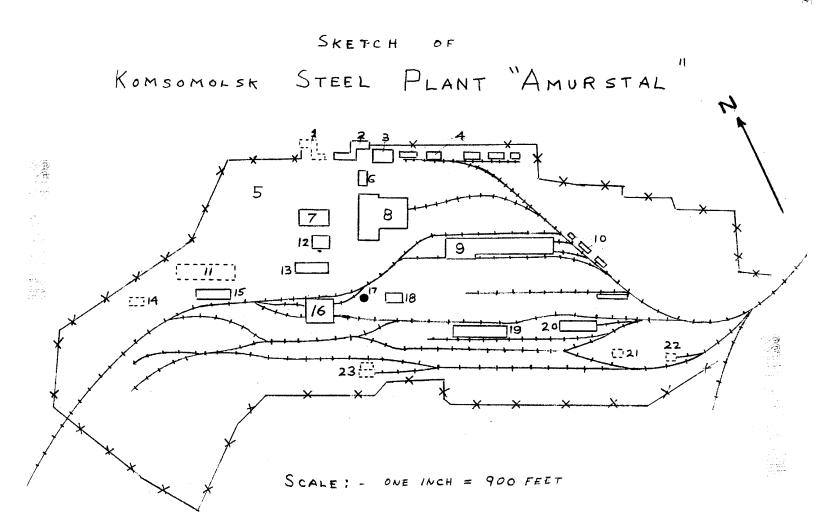

KOMSOMOLSK STEEL PLANT "AMURSTAL"

KEY TO ANNOTATIONS

- 1. Administration Building under construction, multi-story, 155'x 40' with 2 wings, 170'x 55' and 95'x 35'.
- 2. Administration Building, Multi-story, 155'x 40' with 2 wings, 170'x 55' and 95'x 35'.
- 3. Transformer Yard, 180'x 140'.
- 4. Five Warehouses, rail served, 200'x 50', 180'x 75', 180'x 75', 225'x 75', and 105'x 60'.
- 5. Open Storage of large amounts of construction material.
- 6. Office Building, multi-story, 170'x 90'.
- 7. Shop Building, 380'x 150', monitor roof, rail served.
- 8. Heat Treatment Building "L" shaped, 520'x 290' with wing, 340'x 320'.
 Monitor roof.with 75' stack, rail served.
- 9. Rolling Mill, 1600'x 190', monitor roof, rail served.
 - 10. Four Warehouses, rail served, 170'x 40', 170'x 45', 105'x 45' 370'x 45'.
- 11. New Shop Building under construction, 800'x 180'.
- 12. Shop Building, 170'x 130', monitor roof, rail served.
 - 13. Shop Building, 390'x 85', monitor roof, rail served.
 - 14. New Shop Building under construction, steel skeleton, 170'x 100', 50' shigh.
 - 15. Shop Building, 400'x 115', monitor roof, rail served.
- 16. Open Hearth Furnace Building, 300'x 290', monitor roof, two stacks, rail served.
- 17. Water Tower 45' diameter 115' high.
 - 18. Spray Pond, 190'x 120'.

4-52

TOP SECRET CHESS

KEY TO ANNOTATIONS (cont'd)

- 19. Shop Building, 640'x 100', monitor roof, rail served.
- 20. Shop building, 450'x 105', monitor roof, rail served.
- 21. New Shop Building under construction, steel skeleton, gable roof, 135'x 95', 60' high.
- 22. New Shop Building under construction, rail served, 100'x 70'. In initial stage of construction.
- 23. Possible Electric Furnace Building, monitor roof, four stacks, rail served, multi-sectional, 250'x 45', 140'x 85', 95'x 85'.

Approved For Release 2000 1300 14-R046334759A000100010036-7

22. Ref. 4-10. Warehouses

Requirement: Determine number, dimensions, and contents.

Answer : No warehouses in this vicinity.

Remarks: This item is described on the referenced chart as a woodworking plant producing furniture and millwork.

Installation is described as having sawmill, workshops, drying shed, office building, and warehouse.

There is no such plant at the location referenced on the chart. Instead, at the referenced location of the woodworking plant is a large coal storage area for the adjoining large thermal power plant.

Approved For Release 2001/11/07:-CIA-RDP73T04759A000100010036-7

23. Ref. 4-11. Petroleum Products Storage Area.

Requirements: Number and size of tanks.

Answer

Five small cylindrical, peak-topped, P.O.L. storage tanks, 15' high. Also contains small oil drum storage area. This installation is located 600 yards NW of the location given on the referenced chart. The referenced location of this item falls in a coal storage area of a large thermal power plant.

25X1D

Remarks

: Referenced chart describes this installation as containing about 15 horizontal storage tanks, each approximately 25' long, 10' diameter; also drum storage area.

Approved For Release 7001/4/1071 91A PDP78T04759A000100010036-7

24. Ref. 4-12. Petroleum Storage, SE of Amurstal

Requirements: Number and size of tanks.

Answer : One vertical, peaked-top P.O.L. storage tank,

30' diameter, 25' high.

25 horizontal P.O.L. storage tanks. Average length,

30'. Each has 10' diameter.

Remarks : This installation is located on opposite side of road

and 200 yards east of the location given on referenced

chart.

Approved For Release 2001/11/07 : CIA-RDP78T04759A000100010036-7

4-13

25. Ref. 4-12.

Warehouses.

Requirement:

Number, dimensions, contents.

Answer

This is not a warehouse area. This installation is correctly described on the referenced chart as a large flour mill and bakery. The few warehouses present are those normally expected in association

with a flour mill.

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7


26. Ref. 4-15. Submarine Battery Plant 364.

- Requirements: 1. Confirm location.
 - 2. Number, size and construction of buildings.
 - 3. Layout sketch.
 - New construction.

Answer

- 1. A large plant is located at this reported location, but unable to confirm manufacture of submarine batteries.
- 2 & 3. See accompanying annotated sketch.
 - 4. A new workshop building, 350' x 85', is in initial stage of construction.

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7 CR 4-15 SUBMARINE BATTERY PLANT 364

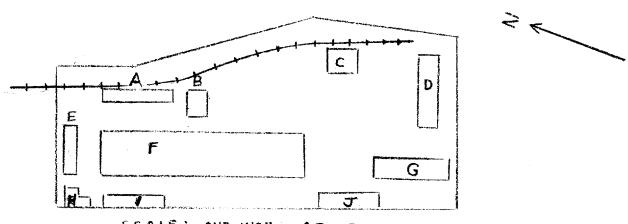

SCALE : ONE INCH = 450 FEET

A WAREHOUSE 320' X85'

B WAREHOUSE 95 x 85

C. STEAM PLANT 125 y 85

D. SHOP BUILDING, 350' x 90', MONITOR ROOF

E ADMINISTRATION BUILDING, 240', 45'

F MAIN SHOP BUILDING, 770' x 180', MONITOR ROOF

G BUILDING UNDER CONSTRUCTION, 350' ×85'

H ADMINISTRATION BUILDING, "L" SHAPED 100' x 40'

I UNIDENTIFIED MULTI-STORY BUILDING

J WAREHOUSE, 280' x65'

Approved For Release 200717/07-CH-RDR78704759A000100010036-7

27. Ref 4-17. Railroad Station, Yards, and Shops.

Requirements: 1. Number and length of tracks.

2. Locomotive repair facilities.

Answer : A detailed PI report of this installation,

requested by S/TR, is in progress.

This report will answer this requirement.

Approved For Release 2001 1007 EIA EDP 6 2000100010036-7

25X1A

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

28. Ref. 4-18. Supply Depot, Southwest.

Requirement: Number, size and construction of warehouses.

Answer Fifteen gable-roofed, wood construction rail-served warehouses, are located in this area. Seven are 210' x 60', five are 210' x 45' and three are 110' x 35'.

Approved For Release 2001/11/07; CIA-RDP78T04759A000100010036-7

29. Ref. 4-19. Petroleum Storage, West.

Requirement: Number and size of tanks.

Answer : No tanks or any evidence of P.O.L. storage within a mile radius of this location.

Approved For Release 200111/01-1014-RD#76-T04759A000100010036-7

30. Ref. 4-20. Port Facilities.

Requirement: Per port requirements.

Answer : Chart Reference 4-20 is described as the main

telephone exchange, which it probably is. This location is $l\frac{1}{2}$ miles from any water or port

facilities.

Remarks : An example of careless clerical work or poor work

of an analyst.

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

31. Ref. 4-21. Warehouse Area.

Requirement: Number, size, and construction of warehouses.

Answer : There is no warehouse area within a mile radius of the location. The referenced location is an

area of light industry and housing.

Approved For Release 2001/11/07: CIA-RDP78T04759A000100010036-7

32. Ref. 4-28. Thermal Power Plant.

Requirement: 1. Confirm location.

- 2. Confirm reported layout and stack arrangement of 2 stacks on large boiler house and h stacks on older boiler house.
- 3. Any sight of expansion?

Answer : 1. Location of this plant is accurately shown on referenced chart.

- 2. Dimensions of combined generator and boiler building are 340' x 180'. The boiler section is 340' x 180' high. Heavy dense smoke precludes a description of the arrangement, height, and number of stacks.
- 3. No evidence of expansion.

Remarks: The only other thermal power plant in Komsomolsk is located near the steel plant and is considerably larger than this one, but there is no requirement for a description of this larger plant.

Approved For Release 2001 1997 SEARTP 1816 359 A000 1000 10036-7

30

33. Ref. 4-20.

Komsomolsk Shipyard Amur 199

Requirements:

Confirm and locate expansion. Type and number of

ships under construction. Number, size, and

construction of buildings. Number of graying docks, layout sketch. Evidence of manufacture of naval guns and naval artillery shells? Operating more

than one shift?

Answer:

A detailed PI report on this shipyard, requested by I/SH, is in progress. This report will

satisfy most of these requirements.

Approved For Release 200 14 1/07 CARD F7 8 7 04 7 5 9 A 0 0 0 1 0 0 0 1

34. Ref. 4-31. Railroad Train Ferry Terminal, West.

Requirement: 1. Size and construction of piers.

2. Number of sidings.

Answer :1&2. This western terminal and its counterpart on the eastern side of the river, consists of three piers, each at a different level above the river.

Apparently only one pier at a time is used depending upon the seasonal level of the river.

Each pier is 800' - 900' long, 4-5 tracks wide, and of earth-fill construction.

The railroad ferries are 310' long and transport four lines of cars, two of which can be loaded and unloaded at the same time.

The four railroad ferries ice-bound at the Komsomolsk Amur Shipyard are the only ferries evident in the area.

A detailed PI report on this facility, requested by S/TR, is in progress.

-25X1A

Approved For Release 2001/11 (1) CALRO 3T04759 A000100010036-7

35. Ref. 4-32. Port Facilities.

Requirement: 1. Number, size, and construction of piers.

2. Number, size, and construction of warehouses.

3. Mechanical handling facilities.

Answer


- : 1. There are no piers, but there are three wharfs.
 The two major wharfs, one 900' long and the other
 300' long, accommodate large ships. One wharf,
 375' long, is used for smaller river craft.
 - 2. Six warehouses. Two 350' x 75', two 200' x 35', one 200' x 75', one 125' x 30'. All single story, wooden construction, rail served.
 - 3. One large elevated cargo handling crane, extends approximately 375' from the rail line. This elevated structure, which resembles a bridge crane, projects over the river to facilitate cargo handling at varying seasoned river levels.

 Two or three small jib cranes are located in the wharf area.

Approved For Release 2001/11/07: CIALRDP78T04759A000100010036-7

TOP SECRET CHESS

KOMSOMOLSK PORT FACILITIES

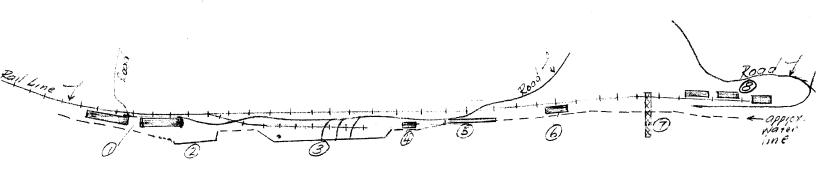

AMUR

- Warehouse, 125' y 30'.

- Two warehouses, early 350'x75', But served. (3) Wharf', 375' long.
 Wharf', 300' long. One crane. (6) Harbor admin. offices
 Wharf, 900' long. One or two cranes. (7) Large cargo harding crave
 fail served.

 Three warehouses. Two 700 x 35, one 700 x 75

TOP CENT CHESTOVED FOR Release 2001/11/07: CIA-RDP78T04759A000100010036-7

Approved For Release 2001/11/07/10/A-RUFF-8-194759A000100010036-7

36. Ref. 4-36. Ammunition Depot, BAM Railway, West

Requirement: Number, size, and construction of storage buildings.

Answer

There is no ammunition depot at this location. However, three miles north of this location, along the BAM Railway is an ammunition depot consisting of eleven, widely-dispersed, gable-roofed wooden storage buildings, each 160' x 55'. This depot is rail served and surrounded by wide cleared strips, double fences and guard towers.

37. Locomotive Repair Plant.

Requirement: Confirm, locate, and give capacity of this plant.

PW's report this plant under construction in post-

war period in western part of city.

Answer : This plant is located in western part of city, $l^{\frac{1}{2}}$

miles west of the R.R. station. A detailed PI

report of this installation, requested by

S/TR is in progress and will answer these

requirements.

25X1A

Approved For Release 2001/11/207\$ (14RPPF110359A000100010036-7

38. Khummi Airfield.

Requirement: Locate and describe this airfield, reported to be 16 Km

SE of PIVAN.

Answer : This airfield not covered by photos. Cannot answer.

Approved For Release 2001/1107 : CIA-RDP78T04759A000100010036-7

39. International Broadcast Facility.

Requirement: 1. Locate this facility, reported to be 4 Km
North of R.R. station, but not referenced on chart.

2. Describe antennas, obtain photographs.

Answer : 1. There is no radio facility 4 Km north of the R.R. station. This area is just woods and farmland. The large international radio facility is located 12 Km north of the R.R. station.

2. A detailed PI report on this major installation, requested by Electronics Division of OSI, is in progress and will fulfill these requirements.

Remarks: The three radio stations annotated on referenced chart as 1-1, 1-2, and 1-3 are all located incorrectly. Actually, there is only one installation, not three.

TOP SECRET

2001/11/07: CIA-RDP78T04759A000100010036-7

TOP SECRET

2001/11/07 : CIA-RDP78T04759A000100010036-